

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

**THIS PAGE BLANK (USPTO)**

PCT

WORLD INTELLECTUAL PROPERTY  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER TH

WO 9608865A2

(51) International Patent Classification 6:

H03C 1/54, H03L 27/20, H03H 7/01, 1/02

A2

(11) International Publication Number:

WO 96/08865

(43) International Publication Date:

21 March 1996 (21.03.96)

(21) International Application Number: PCT/US95/11745

(22) International Filing Date: 14 September 1995 (14.09.95)

(30) Priority Data:  
08/305,702 14 September 1994 (14.09.94) US

(71) Applicant: ERICSSON INC. [US/US]; One Triangle Park, P.O. Box 13969, Research Triangle Park, NC 27709 (US).

(72) Inventor: DENT, Paul, W.; Stehags Prastgard., S-240 36 Stehag (SE).

(74) Agents: GRUDZIECKI, Ronald, L. et al.; Burns, Doane, Swecker & Mathis, P.O. Box 1404, Alexandria, VA 22313-1404 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: QUADRATURE MODULATOR WITH INTEGRATED DISTRIBUTED RC FILTERS

(57) Abstract

A quadrature modulator for generation of complex modulated signals includes a unique pair of balanced, low-pass filters which, through a switching arrangement for switching into and out of the circuit distributed RC line sections and corresponding ground resistances are able to redress problems associated with manufacturing tolerances.

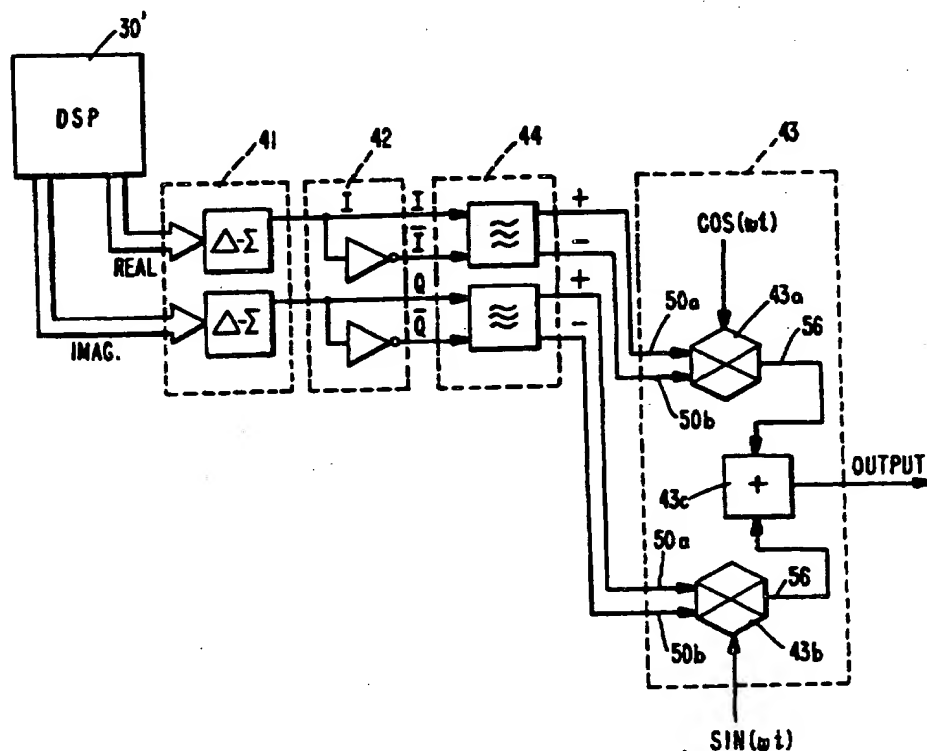

# FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT:

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

## QUADRATURE MODULATOR WITH INTEGRATED DISTRIBUTED RC FILTERS

5

### Background

#### 1) Field of the Invention.

The invention relates to methods and apparatuses for the realization of frequency band-stop, band-pass and low pass filters as integrated circuit elements on a silicon chip for use in a quadrature modulator which can generate complex modulated radio signals.

10

#### 2) Discussion of Related Art.

The prior art for the construction of frequency selective filters includes: (1) passive inductor-capacitor filters; (2) passive resistor-capacitor filters; (3) active RC filters; (4) distributed RC filters; (5) gyrator-capacitor filters; (6) transmission line or waveguide filters; (7) switched capacitor filters; and (8) digital filters, each of which is discussed below.

15

The construction of inductor-capacitor filters on a silicon chip is constrained by the very small inductance values that can be achieved with spiral metallization patterns within a frequency range above about 2 GHz.

20

Passive resistor-capacitor filters can only synthesize a limited subset of the possible frequency responses that might be required, and at low frequencies are limited by the available RC product that can be made while also being limited at high frequencies by stray (parasitic) capacitance and resistance.

- 2 -

Active RC filters can provide useful performance up to a few megahertz, but are limited by the performance and bandwidth of amplifiers as well as the parasitic effects mentioned above. Unfortunately, the amplifiers consume power and limit the dynamic range.

5 Distributed RC filters are, on the other hand, inherently based on the parasitic capacitance and resistance parameters, such as described in "Tidskontinuerliga Lågpåss Filteri CMOS", by Katarina Hansson and Mats Torkelsson, LUTEDX/(TETE-7029)/ pp. 1-26 (1987).

10 Gyrator-capacitor filters use an active impedance inverting circuit to make a capacitor function as an inductor, so that LC equivalent filters may be built. These circuits are useable for bandpass filters up to a few megahertz. The Gyrator-Capacitor filter can be classed as a form of active RC filter.

15 Transmission line or waveguide filters require elements that are typically a quarter wavelength long so their construction on a chip is limited to the micro-wavelengths above 2 GHz.

Switched capacitor filters operate according to a number of different principles, but all require transistor switches to operate at a very much higher frequency than the operating frequency range of the filter. This restricts their use to a few hundred kilohertz. Moreover, the dynamic range of switched-capacitor filters is limited by their high noise levels.

20 Digital filters are very flexible in the frequency response repertoire they can realize, and have the advantage of no tolerances. On the other hand, the signal to be filtered must first exist in digital form and the required analog-to-digital convertors restrict both the dynamic range and speed. Digital logic power consumption is also a factor which restricts such filters to the 300 kHz region or below in practical applications.

25 The frequency range upon which the present invention focusses is the 0.3 MHz to 300 MHz region. This is above the range of most of the techniques mentioned while being below the range for transmission line

30

- 3 -

solutions. Hitherto there has been no practical silicon-integrable solution for these three decades of frequency, which encompass virtually the entire radio communications frequency spectrum. Accordingly, the present invention was conceived to address this important range of frequencies. The present invention makes use of concepts of the distributed RC techniques mentioned above.

#### Summary

The present invention relates to methods and apparatuses for the realization of frequency band-stop, band-pass and low pass filters as integrated circuit elements on a silicon chip.

The inventive method allows the manufacture of continuous-time, analog filters in frequency ranges not conveniently covered by other, known techniques. Such filters are typically required in the generation of complex-modulated radio signals with the aid of digital signal processors and quadrature modulators. The inventive filters are aimed to be suitable for construction as part of integrated circuits for analog or mixed analog/digital radio communications signal processing applications.

In the present invention, new distributed RC filter structures and applications are disclosed, and in particular, means to overcome the problems created by manufacturing tolerances in the resistive and dielectric layer properties. The distributed RC filter structure include means for selectively switching in and out of the circuit incremental RC lines and for selectively switching in and out of the circuit incremental nulling resistors. Several embodiments are disclosed.

- 4 -

Brief Description of the Drawings

The invention will now be described with reference to the accompanying drawings in which:

Figure 1a is a partially schematic diagram of the structure of a distributed RC line in accordance with the present invention;

Figure 1b is the circuit symbol for a distributed RC line filter such as shown in Figure 1a;

Figure 2 is a schematic diagram of a prior art distributed  $RC_{NULL}$  device;

Figure 3 is a schematic diagram of a prior art quadrature modulator arrangement for synthesizing an arbitrary modulated signal;

Figure 4 is a schematic diagram of a quadrature modulator arrangement in accordance with the present invention;

Figure 5 is a schematic diagram showing prior art Gilbert mixers as balanced modulators;

Figure 6 is a schematic diagram of a section of a balanced filter in accordance with the present invention;

Figure 7 is a schematic diagram of a complete balanced filter in accordance with the present invention;

Figure 8 is a schematic diagram of a stepwise adjustable RC line in accordance with the present invention;

Figure 9 is a schematic diagram of a switched nulling resistor combinable with the switched RC line of Figure 8 in accordance with the present invention;

Figure 10 is a schematic diagram showing the use of an adjustable notch filter according to the present invention in a feedback loop for obtaining an adjustable bandpass amplifier response;

Figure 11 is a schematic diagram of a preferred arrangement of a switched-tunable  $RC_{NULL}$  device in accordance with the present invention;



- 5 -

Figure 12 is one possible stepwise-adjustable nulling resistor for use with the switched-tunable  $RC_{NULL}$  device shown in Figure 11 in accordance with the present invention;

Figure 13 is a schematic diagram of a preferred arrangement of a stepwise-adjustable nulling resistor for use with the switched-tunable  $RC_{NULL}$  device shown in Figure 11 in accordance with the present invention; and

Figure 14 is a graph of the frequency response of the filter shown in Figure 7.

#### Detailed Description of the Preferred Embodiments

The inventive filter construction includes a distributed RC line as shown in Figure 1a which utilizes the sheet-resistivity properties of deposited conductive films such as a polysilicon film resistive filter 10, and the capacitance-per-unit-area properties between the resistive filter 10 and a conductive plate 14 (connected to a common by a connection point 14a) with a thin dielectric layer 12 interposed between the layers 10 and 14. The resistive filter 10 includes an input connection point 10a and an output connection point 10b.

In order of the layers' appearance from substrate to top level, the filter is composed of a substrate 13 comprising, e.g., silicon, alumina, gallium arsenide, sapphire or polyamide, an insulating film 11 comprising silicon dioxide, alumina, gallium arsenide, sapphire, polyamide, etc., a conductive plate 14 of heavily doped polysilicon, aluminum, gold or the like, a thin film dielectric layer 12, and a resistive filter 10 composed of polysilicon or the like.

Resistors formed by the polysilicon film 10 are treated as distributed over and insulated from a capacitor plate 14 and, thus, as a distributed RC line that may be described by the resistance per unit length, capacitance per unit length, and length.

The circuit symbol for a distributed RC line is shown in Figure 1b.

- 6 -

Such RC lines have an inherent low-pass type of frequency response that attenuates higher frequencies, but the cut-off is rather gentle. Sharper cut-off low-pass filters generally achieve their characteristics with the aid of notches in the stop band.

5        A notch in the frequency response may be formed using a distributed RC line by connecting its capacitor plate 14' terminal to ground 22 through a resistor 21 of specific value, such as shown in Figure 2. For uniform RC lines, the notch is complete when the resistor connected to ground has the approximate value 0.056 times the total through-resistance  $R_{tot}$  of the  
10        resistive filter 10', and the notch frequency is approximately  $11.2/RC$  radians per second where  $R_{tot}$  is the total through-resistance and  $C$  is the total distributed capacitance.

Once a complete or partial notch can be formed, other frequency responses can be synthesized, such as bandstop, or bandpass, the latter by  
15        including the notch device in the feedback loop of an amplifier such as shown in Figure 10, discussed below.

According to a first aspect of the invention, matched, balanced, low-pass filters are provided in conjunction with a so-called quadrature modulator for the purposes of synthesizing an arbitrarily modulated radio frequency  
20        signal.

According to a second aspect of the invention, means to overcome the high production process spreads (i.e., deviation from ideal values on resistive and dielectric layer properties) are provided. In some processes, typical spreads on the sheet resistivity and capacitance per unit area  
25        parameters can be up to 15% on capacitance and as much as 100% max/min ratio on sheet resistivity. Without the inventive means, the notch frequency given by the RC product could not be guaranteed to within an octave. The inventive means can be used to bring the notch frequency within a desired tolerance when such processes are used. The present invention achieves this

- 7 -

by effectively providing a stepwise-variable line length that can be programmed in-circuit to set the filter frequency to a desired value.

Figure 3 shows a prior art arrangement of a quadrature modulator for synthesizing an arbitrarily modulated signal. A digital signal processor (DSP) 30 calculates time-spaced samples of the real and imaginary parts of a desired complex modulation. The real part is given by the desired amplitude times the cosine of the desired phase angle, while the imaginary part is given by the amplitude times the sine of the phase angle. In this way both Amplitude Modulated (AM) signals or Phase Modulated (PM) signals can be generated, or signals comprising both, the result of which is generally known as complex modulated signals. The numerical samples calculated by the DSP 30 are transferred to a pair of Digital-to-Analog (D-to-A) convertors 31 that convert each numerical sample pair into a pair of analog voltages known as I (In-phase) and Q (Quadrature) signals. A sequence of such numerical samples generates I and Q waveforms but in a stepwise fashion.

The steps in the waveforms cause undesirable spectral components that would interfere with adjacent radio channels unless suppressed. Some techniques for D-to-A conversion provide interpolation between samples giving sloping waveforms between adjacent sample values, which reduces but does not sufficiently eliminate the undesired components. Consequently, I and Q smoothing filters 32 are necessary. These are low-pass filters that pass all modulation spectral components of interest but suppress the higher frequency components of the spectrum associated with the stepwise or piecewise linear I, Q waveforms from the D-to-A convertors 31.

The smoothed I, Q waveforms are applied to a pair of balanced modulators 33 together with cosine and sine carrier frequency signals, this arrangement being known as a quadrature modulator. The arrangement described so far and illustrated in Figure 3 belongs to the well-known prior art.

- 8 -

It is important for accurate signal generation that (1) the two balanced mixers are accurately matched, (2) the levels of the I and Q signals are accurately controlled relative to each other, and (3) the balanced mixers have low carrier leakage or offset, that is, the output signal of a balanced modulator should be zero when its respective I or Q modulating signal is zero.

Since the I and Q signals vary from positive to negative, if a circuit is required to operate only from a single positive supply, then the zero point of an I or Q waveform cannot be defined to be zero voltage, but must be defined to be some positive reference voltage such as half the supply voltage. Then when an I or Q waveform swings below this reference voltage it will be interpreted as negative, and positive when it swings above.

Unfortunately, it is difficult to generate a reference voltage from the DSP 30 that is exactly equal to the voltage the D-to-A convertors supply with an input numerical value of zero. This problem is overcome in the invention by use of the balanced configuration shown in Figure 4, which uses special D-to-A conversion techniques to generate I and Q signals as well as their complements  $\bar{I}$  and  $\bar{Q}$ .

In accordance with the present invention as shown in Figure 4, the numerical I and Q signals from DSP 30' are transferred to a delta-sigma ( $\Delta$ - $\Sigma$ ) convertor 41. This device is built according to known art to generate a high bitrate stream of binary '1's and '0's having a short-term average value proportional to the numerical input value. With a maximum possible numerical input value the bit stream produced would be 11111 ... (the voltage of a '1' condition being equal to the chosen supply voltage) while the minimum numerical input value will generate the bit pattern 00000 .... A half-scale numerical input will produce the bit stream 10101010 ... having an average voltage equal to half the supply voltage. According to an aspect of the present invention, extra inverter gates 42 are provided at the output of each delta-sigma convertor 41 to additionally generate the complementary

- 9 -

bitstreams. That means when delta-sigma convertors 41 produce a bit stream 100100100100 ... having a mean of  $1/3$  the supply voltage, the complementary bit stream will be 011011011011 ... having a mean of  $2/3$  the supply voltage. The difference between these two is  $1/3 - 2/3 = -1/3$  of the supply voltage. If the convertor produces 111011101110 ... having a mean of  $+3/4$  of the supply voltage then the complementary signal 000100010001 ... will have the mean  $1/4$ , so that the difference is  $3/4 - 1/4 = +1/2$  supply. Consequently, by using the difference between the convertor output signal and its complement to represent an I or Q signal, the value represented can be positive or negative even with a single positive voltage supply, and no reference voltage need be generated. The balanced mixers 43a and 43b are therefor provided with balanced, two-wire inputs rather than single-ended inputs, that are responsive to the difference in the signals on the two wires and unresponsive to the absolute or common-mode voltage (sum of the voltages) on the two wires.

High bitrate delta-sigma modulation bitstreams are simply converted to the analog voltage they represent by forming the moving average voltage over a large number of bits. This may be done using a continuous-time, low-pass filter having a bandwidth which is a small fraction of the bitrate, but still sufficient to pass all desired modulation components. For the balanced signal configuration developed in this invention, balanced filters 44 are interposed between the delta-sigma convertor outputs and the I, Q balanced modulators 43.

The balanced modulators 43 may include so-called Gilbert mixers 43a and 43b such as shown in Figure 5. As shown in Figure 5, the balanced I or Q inputs 50a and 50b of the Gilbert mixers is applied to the bases of two transistors 51a and 51b. The emitters of the two transistors 51a and 51b are commonly connected through respective resistors 52a and 52b to a common bias current source 53. Each of the collectors to the two transistors 51a and 51b are respectively connected to a pair of commonly connected emitters of

- 10 -

two pairs of transistors 54a, 54b and 55a, 55b. The base of one transistor 54a, 55b from each of the transistor pairs 54 and 55 are commonly connected to one side of a cosine or sine signal generator 56, with the other base of one transistor 54b, 55a of each of the transistor pairs 54 and 55 being commonly connected to the other side of the cosine or sine generator 56. The collectors of one transistor of each of the two transistor pairs 54a and 55a are commonly connected to one output line 57a, with the other collectors of one FET of each of the two transistor pairs 54b and 55b being commonly connected to the other output line. These balanced modulators can be formed in the same substrate as the balanced low pass filters.

The outputs of the balanced modulators 43a and 43b of Figure 4 are added together by an adder 43c, to result in a complex modulated radio signal.

The balanced I or Q input signals swing around a mean voltage of half the supply (e.g., around 2.5 volts for a 5 volt supply) but the amplitude of the peak-to-peak voltage excursions should be somewhat less, for example,  $\pm 250\text{mV}$ . The delta-sigma convertor output, however, can at its extremes swing between 0 and 5 volts on each output line or its complement, and therefore a 1/20 attenuation of the balanced mode signal is called for while no attenuation of the common mode voltage (2-5 volts) is required in this embodiment.

A basic filter section 44 according to the invention which accomplishes the appropriate attenuation of the balanced mode signal is shown in Figure 6. Two identical  $RC_{\text{NULL}}$  devices 61, 62 provide a low-pass filtering action to both balanced (push-pull) and common mode signals, with a notch in the frequency response.

The balanced filter includes two input terminals for I,  $\bar{I}$  or Q,  $\bar{Q}$  and two output terminals 50a and 50b, and a common terminal connected to ground. A series resistor  $R_s$  is connected between an input terminal I or Q and an output terminal 50a, and an identical resistor  $R_s$  is connected between

- 11 -

a second input terminal  $Q$  or  $\bar{Q}$  and a second output terminal 50b. Each of the resistors  $R_s$  can be formed by depositing a pattern of resistive material over respective conducting plates with an intervening dielectric layer, such as shown in Figure 1, to provide distributed capacitance between the resistive pattern and the conductive plate.

A resistor or resistors  $R_{NULL}$  are connected between each of the conducting plates to the common terminal, or between the conducting plates, or both. A shunt resistor  $R_p$  is connected between the output terminals of at least one of the filter sections (when cascaded, as discussed below with reference to Figure 7).

This filter 44 has a common mode attenuation of unity at direct current and low frequencies, as there is no resistance to ground. In other words, the pair of balanced, lowpass filters attenuate to a different degree, or not at all, the common mode signal defined as the sum of the voltages on the two input lines or two output lines, compared to the balanced mode defined as the difference of the voltages on the two input or output lines. In the balanced mode, the attenuation is  $R_p/(2R_s + R_p)$  due to the resistor  $R_p$  connected between the output terminals. This may be set to 1/20 or other desired value less than unity by choice of the shunt resistor  $R_p$  relative to resistive filter  $R_s$ . The desired value is defined as the difference in voltages between the two input lines or the two output lines.

Another effect of the shunt resistor  $R_p$  is to emphasize the high frequency response in the balanced mode relative to the low frequency response, as the high frequency attenuation tends to unity. This has the desirable effect of sharpening up the rate of cutoff. The rate of cutoff may be further sharpened by exponential tapering of the RC line.

A complete filter design consisting of a cascade of such balanced sections is shown in Figure 7. A series of balanced  $RC_{NULL}$  devices 70, 71, 72, 73, each characterized by a starting line width, an exponential tapering factor (MAX/MIN width ratio), a total resistance  $R_{tot}$  and a total capacitance

- 12 -

Ctot are cascade connected by depositing distributed RC lines having resistive patterns deposited over a conductive plate over an intervening dielectric film on a substrate, such as shown in Figure 1. Shunt resistors Rp1, Rp2, Rp3, Rp4 are connected between the output terminals of each section to provide graduated attenuation. The total attenuation in the balanced mode is set to the desired value by choice of these shunt resistors, but there is a continuum of ways to do the ranging from all attenuation in the first section Rp1 to all attenuation in the last section Rp4. An optimum distribution of the attenuation between the sections can be found by trial and error using computer simulation which gives the sharpest rate of cutoff. Likewise, an optimum set of line widths and tapers can be found within constraints on minimum line width and maximum allowed filter area that gives the sharpest rate of cutoff. The values of a near optimum design for a cutoff frequency of 150 kHz are shown in Table 1 and its resulting frequency response is shown in Figure 14.



- 13 -

TABLE 1

70	$W_{MAX71}$	LINE WIDTH AT THICK END= 20.00000 MICRONS TAPERING FACTOR= 20.00000
	$R_{TOTAL}$	TOTAL RESISTANCE= 118.83687 k $\Omega$
	$C_{TOTAL}$	TOTAL CAPACITANCE= 47.53474 pF
	$R_{NULL71}$	NULLING RESISTOR= 3.16380 k $\Omega$ ATTENUATION FACTOR= 1.41410
	$R_{PT1}$	SHUNT ATTENUATION RESISTOR= 286.97623 k $\Omega$
71	$W_{MAX72}$	LINE WIDTH AT THICK END= 1.01000 MICRONS TAPERING FACTOR= 1.01000
	$R_{TOTAL}$	TOTAL RESISTANCE= 271.01572 k $\Omega$
	$C_{TOTAL}$	TOTAL CAPACITANCE= 5.47452 pF
	$R_{NULL72}$	NULLING RESISTOR= 15.22687 k $\Omega$ ATTENUATION FACTOR= 2.82820
	$R_{PT2}$	SHUNT ATTENUATION RESISTOR= 194.20894 k $\Omega$
72	$W_{MAX73}$	LINE WIDTH AT THICK END= 1.01000 MICRONS TAPERING FACTOR= 1.01000
	$R_{TOTAL}$	TOTAL RESISTANCE= 171.40543 k $\Omega$
	$C_{TOTAL}$	TOTAL CAPACITANCE= 3.46239 pF
	$R_{NULL73}$	NULLING RESISTOR= 9.63032 k $\Omega$ ATTENUATION FACTOR= 4.00000
	$R_{PT3}$	SHUNT ATTENUATION RESISTOR= 98.98187 k $\Omega$
73	$W_{MAX74}$	LINE WIDTH AT THICK END= 1.01000 MICRONS TAPERING FACTOR= 1.01000
	$R_{TOTAL}$	TOTAL RESISTANCE= 98.96096 k $\Omega$
	$C_{TOTAL}$	TOTAL CAPACITANCE= 1.99901 pF
	$R_{NULL74}$	NULLING RESISTOR= 5.56007 k $\Omega$ ATTENUATION FACTOR= 1.25000
	$R_{PT4}$	SHUNT ATTENUATION RESISTOR= 692.78949 k $\Omega$

5

- 14 -

A practical problem is how to control in mass production the resistivity of the deposited films to be equal to the target value assumed in the design. If the resistivity varies, the whole frequency response scales proportionally. For example, double the resistivity would halve the cutoff and null frequencies while half the resistivity would double all frequencies. In the case where practical production tolerances are too wide to permit the frequency response to be held within desired limits, the second aspect of the invention may be applied to adjust the frequency response to be within limits after manufacture. This is done by means of an inventive means for stepwise variation of the line length.

A first configuration according to this aspect the invention is shown in Figure 8. It is to be understood that the circuit of Figure 8 can replace any of resistive lines of the balanced null devices 70, 71, 72, 73 shown in Figure 7.

The step-wise-adjustable line or notch frequency filter includes at least one input 70a, at least one output 70b and a common terminal 70c. A number of resistive elements 80, 81, 82 and 83 may be formed as thin films deposited over a corresponding number of conducting plates with an intervening dielectric layer, such as shown in Figure 1. The resistive elements are connected in series between the input 70a and output 70b terminals.

A number of switches 85, 87, 89 are arranged to be able to selectively bypass or shortout a respective resistive element. A corresponding number of switches 84, 86, 88 are arranged to be able to selectively connect together respective conducting plates with resistive elements which have not been bypassed and hence through a resistance connected to common terminal 70c. The value of the series connected resistances is changed according to which of the resistive elements is bypassed.

- 15 -

An RC line 80 of a normalized length of one unit is permanently in circuit, while other RC lines 81, 82, 83 of lengths, for example, 1/2, 1/4, 1/8, etc., units may be switched in or out of circuit by switching selected pairs of switches 84, 85; 86, 87; and 88, 89. The effective line length may thus be switched between the values 1, 1.125, 1.25, 1.375, 1.5, 1.625, 1.75, and 1.875 in this example. Since increasing the length increases both the total through-resistance and capacitance, the RC product follows the square of these values, and thus is controlled over almost a 4:1 range.

If it is only desired to vary the RC product over a 2:1 range, the maximum line length need only be  $\sqrt{2} = 1.414$  times the minimum line length and this is achievable with switched sections of length 0.207, 0.1035, 0.052 units, etc. With only three such switched sections, 5% line-length steps corresponding to 10% frequency steps are achievable, and if the nearest frequency step to a desired value is selected, the error is only  $\pm 5\%$ .

To create a tunable notch filter with the above arrangement, the resistor from the capacitor plate to ground is also varied to maintain a certain fraction (e.g., 0.056) of the through-resistance. Thus, a switched resistor to ground is also used, such as shown in Figure 9 for example. It is to be understood that the switched nulling resistor circuit of Figure 9 can replace one or more of the resistors  $R_{NULL1}$  through  $R_{NULL4}$  of Figure 7.

As shown in Figure 9, the switched nulling resistor usable in conjunction with the circuit of Figure 8 includes a first, non-switchable null resistor 90 with a relative value  $R_{NULL}$ , to which is connected one end of three series connected null resistances 91, 92, and 93. The three null resistances 91, 92, 93 having relative values of, e.g.,  $1/2 R_{NULL}$ ,  $1/4 R_{NULL}$  and  $1/8 R_{NULL}$ , respectively. The three resistances 91, 92, 93 are selectively switchable into and out of the circuit by parallel connected switches 94, 95, and 96.

While the circuits shown in Figure 8 and Figure 9 may be manufacturable using field effect transistor switches, there can be problems

- 16 -

with the capacitance and resistance of the switches, as well as limitations on the dynamic range of signal voltage swing through the filter imposed by the switch transistor characteristics.

5 The preferred implementation of a tunable notch filter in accordance with the present invention, such as shown in Figures 11 and 13, largely eliminates these problems and gives a notch filter that can operate with a rail-to-rail signal swing.

10 It will be appreciated that once a notch filter can be formed on a desired frequency, low-pass filters can be constructed by the cascade connection of such devices to position notches in the stop band so that all frequencies above a certain range are suppressed to a desired extent. Such filters may not have the same sharpness of cutoff as, for example, LC filters, but the present invention does allow practical and useful filters to be made in the frequency range 0.3 to 300 MHz, and such a filter has been successfully  
15 fabricated that passes frequencies up to about 3 MHz with little attenuation but has high attenuation at 12 MHz and above by the positioning of notches at 12.5 MHz, 35 MHz, 52 MHz and 300 MHz. Because tolerances on the higher frequency notches further away from the passband have little effect on the passband, it was determined that in this instance they did not need to be  
20 tunable, and that only the filter having its notch frequency nearest the passband had to be tunable to remove the effect of process spreads.

Figure 10 shows how an adjustable notch filter can be used to obtain a bandpass amplifier response suitable for frequency-selective, intermediate frequency amplification in radio systems of appropriate bandwidth. A  
25 tunable notch device 102 according to the invention is connected as the feedback path around an amplifier 101 such that the gain is suppressed outside the notch frequency when the filter 102 allows a strong, negative feedback signal through, while the gain is high around the notch frequency when the negative feedback effect is reduced. A cascade of such tunable  
30 selective amplifiers can be used to form an integrated circuit intermediate

- 17 -

frequency strip for small, portable radio receivers. The "tuning bits" shown in Figure 10 refer to control signals which operate switches 125-132 of Figure 11 and 140-143 of Figure 13.

A preferred arrangement for an adjustable notch filter that does not suffer loss of dynamic range due to the transistor switches is described below.

Adjustment of the notch frequency is provided by means of a stepwise adjustable line length using an advantageous, inventive configuration. This is used with a matching stepwise adjustable resistor to form the adjustable notch device.

A preferred implementation of the adjustable RC line is shown in Figure 11. A main, permanently in-circuit line section 110 is cascade-connected with switchable sections 111, 112, 113, 114 on either side. Two switchable sections 111, 112 on the left hand side as shown in Figure 11 have line lengths that are a first fraction  $dL$  of the main line length  $L$ . The two switchable sections 113, 114 on the right hand side have fractional lengths  $3dL$ . Thus, various effective line lengths can be achieved by switching by corresponding switches 115, 116, 117, 118, 119, 130, 131, 132 the switchable sections in or out of circuit in the following combinations:

111	112	113	114	Effective line length
out	out	out	out	$L$
out	in	out	out	$L+dL$
in	in	out	out	$L+2dL$
out	out	in	out	$L+3dL$
out	in	in	out	$L+4dL$
in	in	in	out	$L+5dL$
out	out	in	in	$L+6dL$
out	in	in	in	$L+7dL$
in	in	in	in	$L+8dL$

An important feature achieved by the above arrangement is that the line sections switched into circuit are always contiguous, i.e., no

- 18 -

combination of lines such as "in out in" is used. This enables simplification of the switching so that the capacitor plates only of the lines need to be switched. In other words, the switching is thereby simplified as it is only necessary to switch the capacitor plate terminals of the line sections, and not the series resistive part. To switch a line section  $dL$  or  $3dL$  to add to the main line length, its capacitor plate is connected to the capacitor plate of the main line (e.g., by switch 115). To prevent the line section adding to the main line length, its capacitor plate is either left unconnected or connected to ground (e.g., by switch 119). The switched out sections therefore appear as separate, short RC lines or series resistors that are in cascade with the device and not additive to the effective main line length  $L$ . Thus, when the main line terminal is connected to ground via the nulling resistor of Figure 13, for instance, the frequency to the null in the frequency response so created is not affected by the switched-out sections.

To provide a matching, stepwise-adjustable nulling resistor, the arrangement of Figure 12 could in principle be used. This has a main resistor  $R_{NULL}$  123 of nominal value  $0.056$  of the resistance of the main RC line total resistance. Two switchable sections (126, 127) of fraction  $dL/L$  times the main nulling resistor  $R_{NULL}$  and two switchable sections (124, 125) of value  $3dL/L$  are provided, enabling the same control signals that select the line sections to be used to select corresponding switchable parts of the nulling resistor of Figure 12.

A disadvantage of the arrangement of Figure 12 is that the resistance of the switch transistors that can be fabricated on a silicon chip is appreciable compared to the switched resistance. Therefore, the improved arrangement of Figure 13 is disclosed.

In Figure 13, adjustment of the total effective resistance  $R$  is accomplished by switched shunt resistors of high value instead of switched series resistors of low value. The main resistor value  $R$  in Figure 12 is now shown in Figure 13 divided into a fraction  $aR$  and a fraction  $(a-1)R$ . In

- 19 -

parallel with the first fraction  $aR$  are connected two resistors  $R1$  and  $R2$  switchable into and out of the circuit by two transistors 135, 136. Switching in  $R1$  will reduce the effective value  $aR$  to  $aR-dR$  where  $dR$  is equal to  $(aR)^2/(aR+R1)$ , while switching in both  $R1$  and  $R2$  will reduce the effective value  $aR$  to  $aR-2dR$ . Likewise, the two additional resistors  $R3$  and  $R4$  connected in parallel to  $(1-a)R$  and switchable into and out of the circuit by two additional transistors 137, 138 allow the resistance  $(a-1)R$  to be reduced to  $(a-1)R-3dR$  or  $(a-1)R-6dR$ . Thus, all values of total resistance from  $R$  to  $R-8dR$  in steps of  $-dR$  can be achieved.

Since the adjustment of  $R$  is in the downward direction, the value of  $R$  must initially be set to  $8dR$  ohms higher than in Figure 13, and the switching transistors 135-138 must be operated by inverse control signals to those of the switches 115 to 118 of Figure 11. The value of the fraction " $a$ " may be chosen so that smallest of the four switchable resistors  $R1$ ,  $R2$ ,  $R3$  and  $R4$  is as great as possible in order to minimize the influence of series switch resistance. If " $a$ " is too small, then  $R1$  and  $R2$  will be unnecessarily small while  $R3$  and  $R4$  are large, and vice versa if " $a$ " is too large. Therefore, an optimum exists that can be found by calculation.

The construction of the notch filters and adjustable notch filters and their applications has been described here under the assumption that integration on a silicon integrated circuit is the aim, but one skilled in the art can readily adapt the invention to other forms of fabrication or applications, such adaptations nevertheless being considered to be within the scope of the invention as set forth in the claims. The above discussion of the exemplary embodiments is for purposes of explanation and not limitation. The scope of the invention should be determined by reference to the appended claims:

- 20 -

I claim:

1. A quadrature modulator for the generation of complex modulated signals, comprising:

5 a digital sample generator producing a sequence of numerical value pairs respectively representing a real and imaginary modulating waveform;

10 a delta-sigma convertor circuit converting said sequence of pairs of numerical values to a high bit rate stream I representing said real waveform and a high bit rate stream Q representing said imaginary waveform, and additionally a bitstream  $\bar{I}$  being the complement of I and a bitstream  $\bar{Q}$  being the complement of Q;

a pair of balanced, low-pass filters each having two inputs accepting said bitstreams I,  $\bar{I}$  and Q,  $\bar{Q}$  respectively and each having two output lines providing balanced, filtered I and Q signals;

15 a first balanced modulator having a first, balanced input including two lines connected to said balanced, filtered I signals, and a second input connected to a cosine carrier frequency signal generator;

20 a second balanced modulator having a first, balanced input including two lines connected to said balanced, filtered Q signals, and a second input connected to a sine carrier frequency generator; and

an adder for adding said first and second balanced modulator outputs together.

25 2. A quadrature modulator according to claim 1 wherein each of said first and second balanced modulators is responsive to a difference in voltages presented to the two lines of its said balanced input and unresponsive to changes in the sum of said voltages.



- 21 -

3. A quadrature modulator according to claim 1 wherein said pair of balanced, low-pass filters attenuate to a desired level a balanced mode signal, being defined as the difference in voltages between said two input lines or two output lines, and attenuate to a different degree or not at all a common-mode signal, being defined as the sum of the voltages on said two input lines or two output lines.

4. A quadrature modulator according to claim 3 wherein said balanced, low-pass filters are comprised essentially of resistive and capacitive elements.

5. A quadrature modulator according to claim 3 wherein said pair of balanced, low-pass filters include resistive and capacitive elements formed by depositing resistive and dielectric films on a substrate.

6. A quadrature modulator according to claim 5 wherein said substrate is formed of a material selected from the group consisting of silicon, alumina, gallium arsenide, sapphire, and polyamide.

7. A quadrature modulator according to claim 5 wherein said substrate is a semiconductor material and said balanced modulators are constructed on said substrate using transistors formed in said semiconductor material.

8. A quadrature modulator according to claim 3 wherein said balanced, low-pass filters are constructed by use of distributed RC lines having a resistive pattern deposited over a conducting plate with an intervening dielectric layer.

- 22 -

9. A quadrature modulator according to claim 8 wherein said conducting plate is connected to ground through a resistance so as to form a notch in the filter frequency response.

5 10. A quadrature modulator according to claim 8 wherein said conducting plate of one RC line is connected through a resistance to said conducting plate of another RC line.

10 11. A quadrature modulator according to claim 9 wherein a number of said frequency notches are formed by a corresponding number of RC lines having resistances connected between ground and respective conducting plates.

12. A quadrature modulator according to claim 8 wherein an effective product of a total resistance with a total distributed capacitance of at least one of said distributed RC lines can be adjusted to a desired value after formation of said distributed RC lines.

15 13. A quadrature modulator according to claim 9 wherein an effective product of a total resistance with a total distributed capacitance of at least one of said distributed RC lines can be adjusted to set a notch frequency to a desired value after formation of said distributed RC lines.

20 14. A quadrature modulator according to claim 8 wherein at least one of said distributed RC lines is tapered.

15. A quadrature modulator according to claim 14 wherein said taper is exponential.

- 23 -

16. A low-pass filter suitable for construction on an integrated circuit, comprising:

a number of filter sections each having two input terminals and two output terminals and a common terminal, each filter section comprising:

a series resistor connected between a first input terminal and a first output terminal of said filter section and a substantially identical resistor connected between a second input terminal and a second output terminal of said filter section, each of said resistors being formed by depositing a pattern of resistive material over respective conducting plates with an intervening dielectric layer to provide distributed capacitance between said resistive pattern and said conductive plate;

a resistive means connected between each of said conducting plates to said common terminal, or connected between said conducting plates, or both;

a resistor connected between the output terminals of at least one of said filter sections,

said filter sections being cascade-connected such that the output terminals of one section are connected to the input terminals of the next.

17. A low-pass filter according to claim 16 wherein at least one of said resistive patterns is tapered.

18. A device according to claim 17 wherein said taper is exponential.

19. A device according to claim 16 wherein a product of a value of said series resistor with a total of said distributed capacitance of at least

- 24 -

one of said sections can be adjusted to a desired value in order to determine a notch frequency after formation of said low pass filter.

20. A stepwise-adjustable notch frequency filter comprising:
- 5 at least one input terminal and at least one output terminal and a ground terminal;
- a number of resistive elements constructed as thin films deposited over a corresponding number of conducting plates with an intervening dielectric layer, said resistive elements being connected in series between said at least one input and said at least one output terminal of said
- 10 filter;
- a number of switches arranged to be able to selectively bypass certain of said resistive elements;
- a corresponding number of switches arranged to be able to selectively connect together certain of said conducting plates associated with
- 15 unbypassed resistive elements and to a common terminal which is connected through a resistance to said ground terminal; and
- means to change the value of said resistance depending on which of said resistive elements are switch-bypassed.

21. A stepwise-adjustable notch frequency filter comprising:
- 20 at least one input terminal and at least one output terminal and a common terminal;
- a first number of resistive elements constructed as thin films deposited over a corresponding number of conducting plates with an intervening dielectric layer, said resistive elements being connected in series
- 25 between an input and an output terminal of said filter;
- a second number of switches arranged to selectively connect certain of said conducting plates together to a resistance connected to said common terminal; and

- 25 -

means to change the value of said resistance depending on which of said conducting plates are switch-connected to said resistance.

22. A device according to claim 21 wherein said switches can be operated to connect selected conducting plates alternatively to said common terminal or through said resistance to said common terminal.

23. A device according to claim 21 wherein said switches can be operated independently to select each conducting plate to be connected either to said common terminal through a separate resistance for each plate or to be connected to a common resistance connected to said common terminal.

24. A device according to claim 21 wherein said switches are operated only to select conducting plates associated with sequentially contiguous resistive elements to be connected together.

25. A device according to claim 22 wherein said switches are operated only to select conducting plates associated with sequentially contiguous resistive elements to be connected together.

26. A device according to claim 23 wherein said switches are operated only to select conducting plates associated with sequentially contiguous resistive elements to be connected together.

27. A device according to claim 20 wherein the lengths of said switch-selectable resistive elements are in the binary ratios  $1: 1/2 : 1/4 : \dots 1/2^n$ , where  $n$  is equal to the number of resistive elements minus one.


- 26 -

28. A device according to claim 20 wherein one of said resistive elements is permanently in circuit and the remainder of said resistive elements are switch selectable and have length ratios in a binary progression.

5 29. A device according to claim 24 wherein one of said conductor plates is permanently connected to permanently connected to said common terminal and the remainder of said conducting plates can be selectively switch-connected to said common terminal.

10 30. A device according to claim 29 wherein said remainder of conducting plates being switchable are disposed on each side of said permanently connected plate as dispersed on a semiconductor substrate.

15 31. A device according to claim 30 wherein said switchable plates disposed on one side of said permanently connected line have associated resistive elements of length one unit increment and the switchable plates disposed on the other side have associated resistive element lengths equal to  $N+1$  unit increments where  $N$  is the number of switchable plates disposed on said first side.

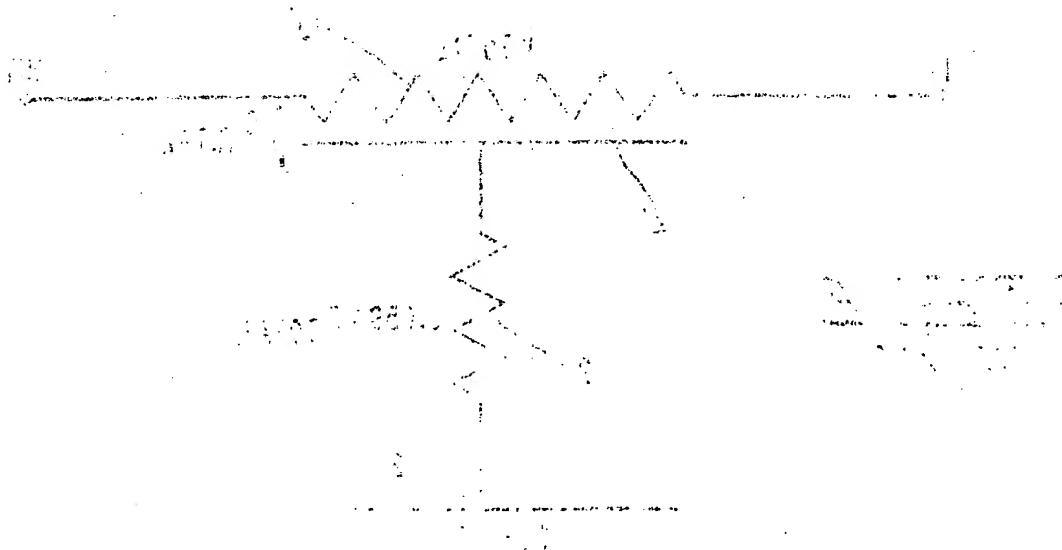

1/7

Fig. 1a

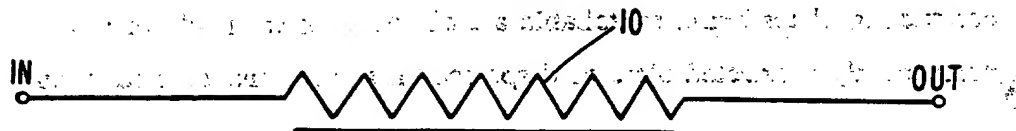
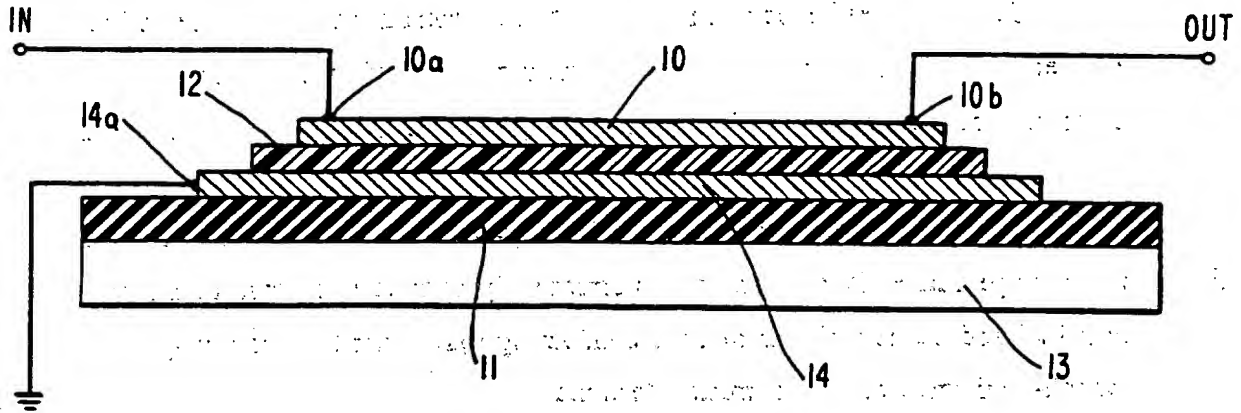


Fig. 1b

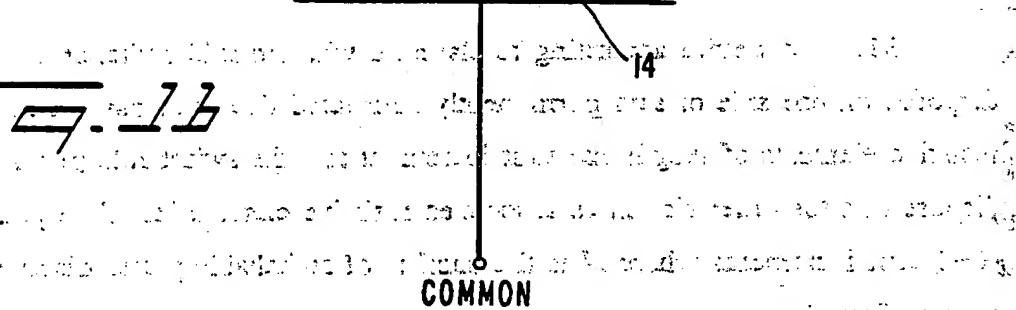
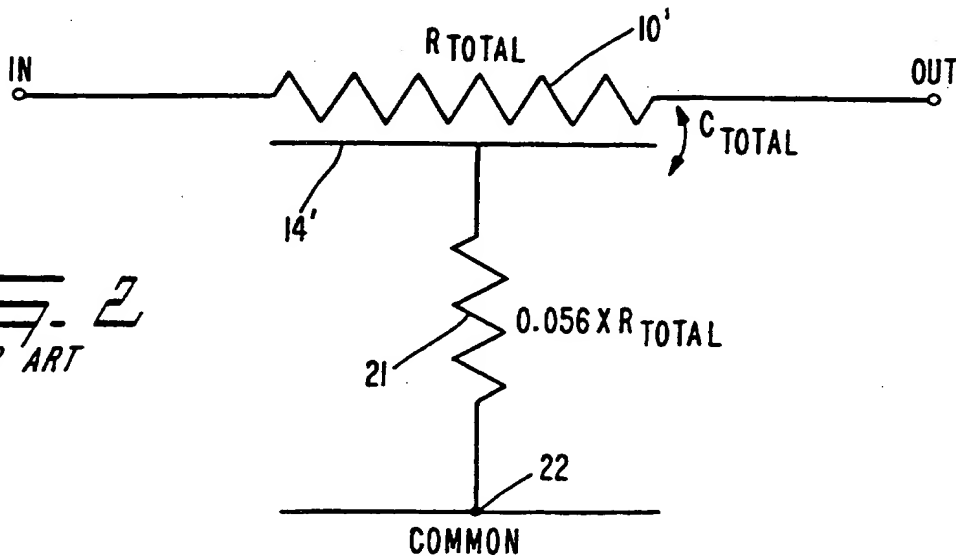


Fig. 2  
PRIOR ART



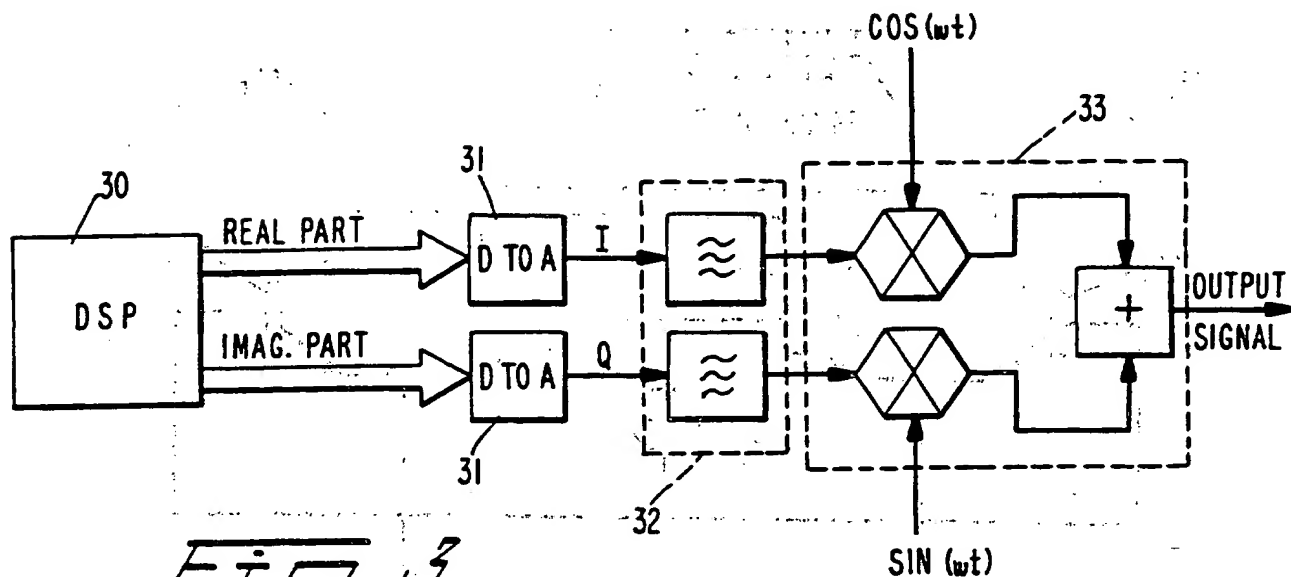


FIG. 3  
PRIOR ART

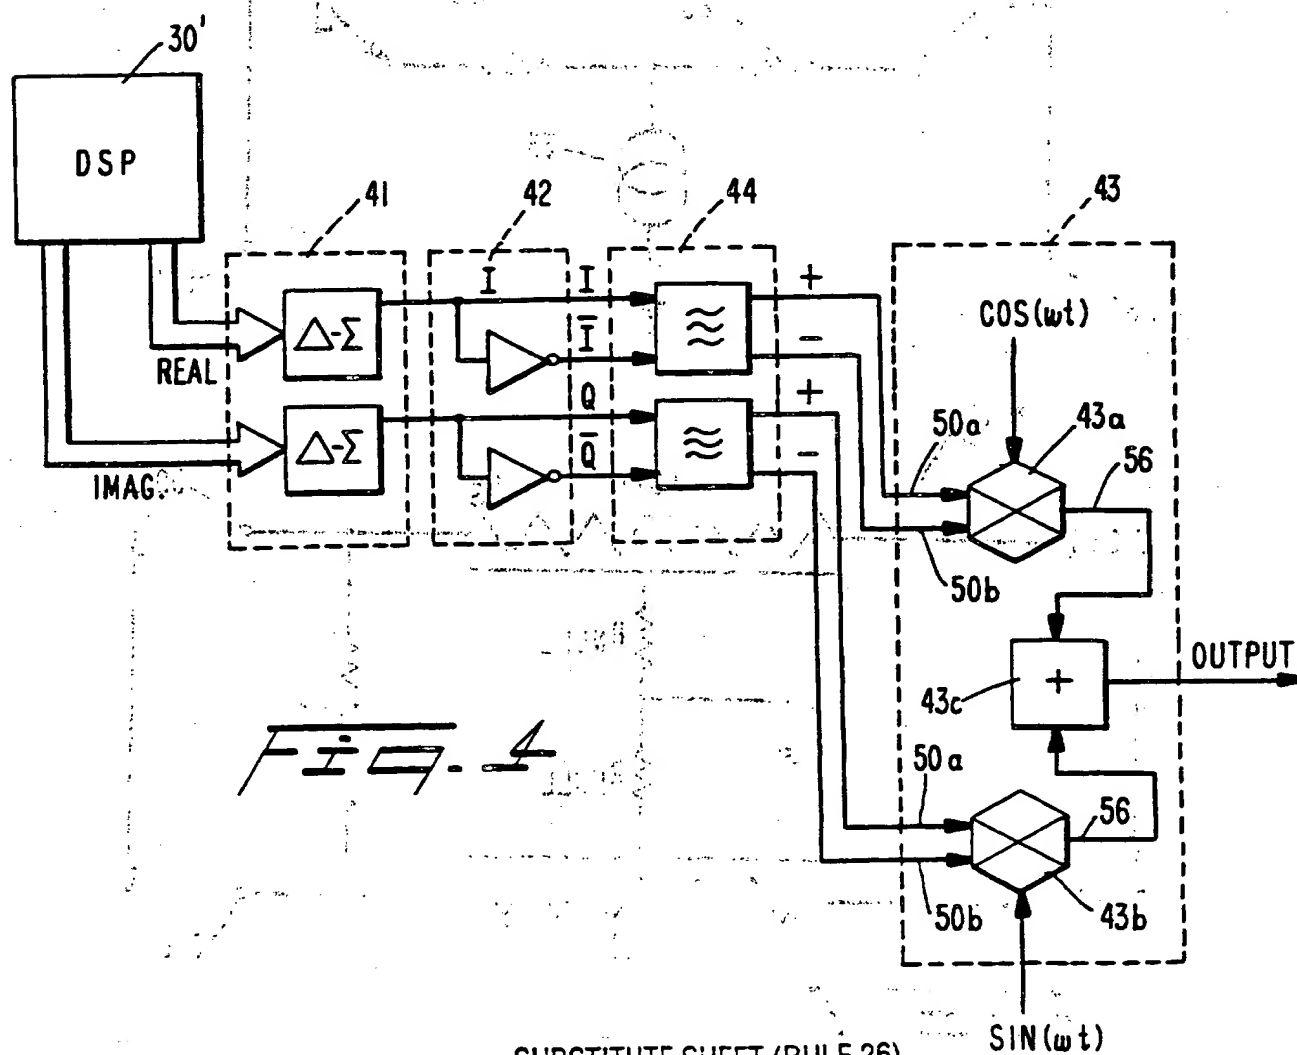
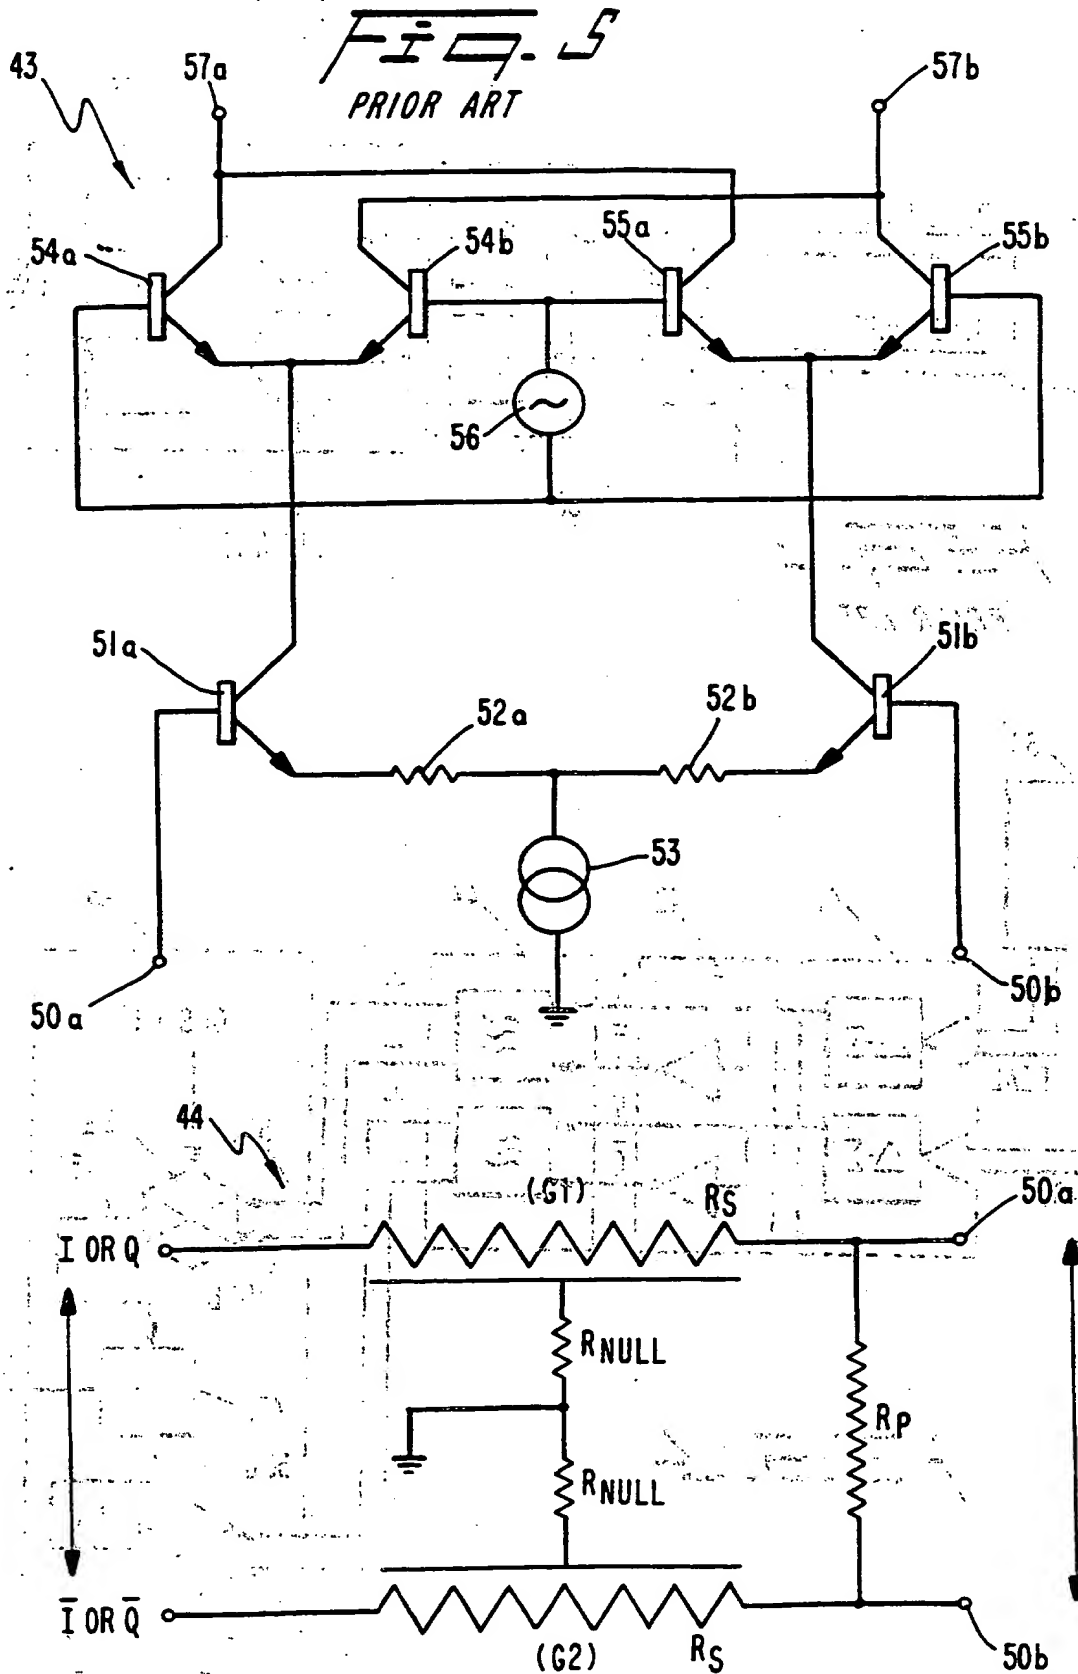


FIG. 4





**FIG. 6**

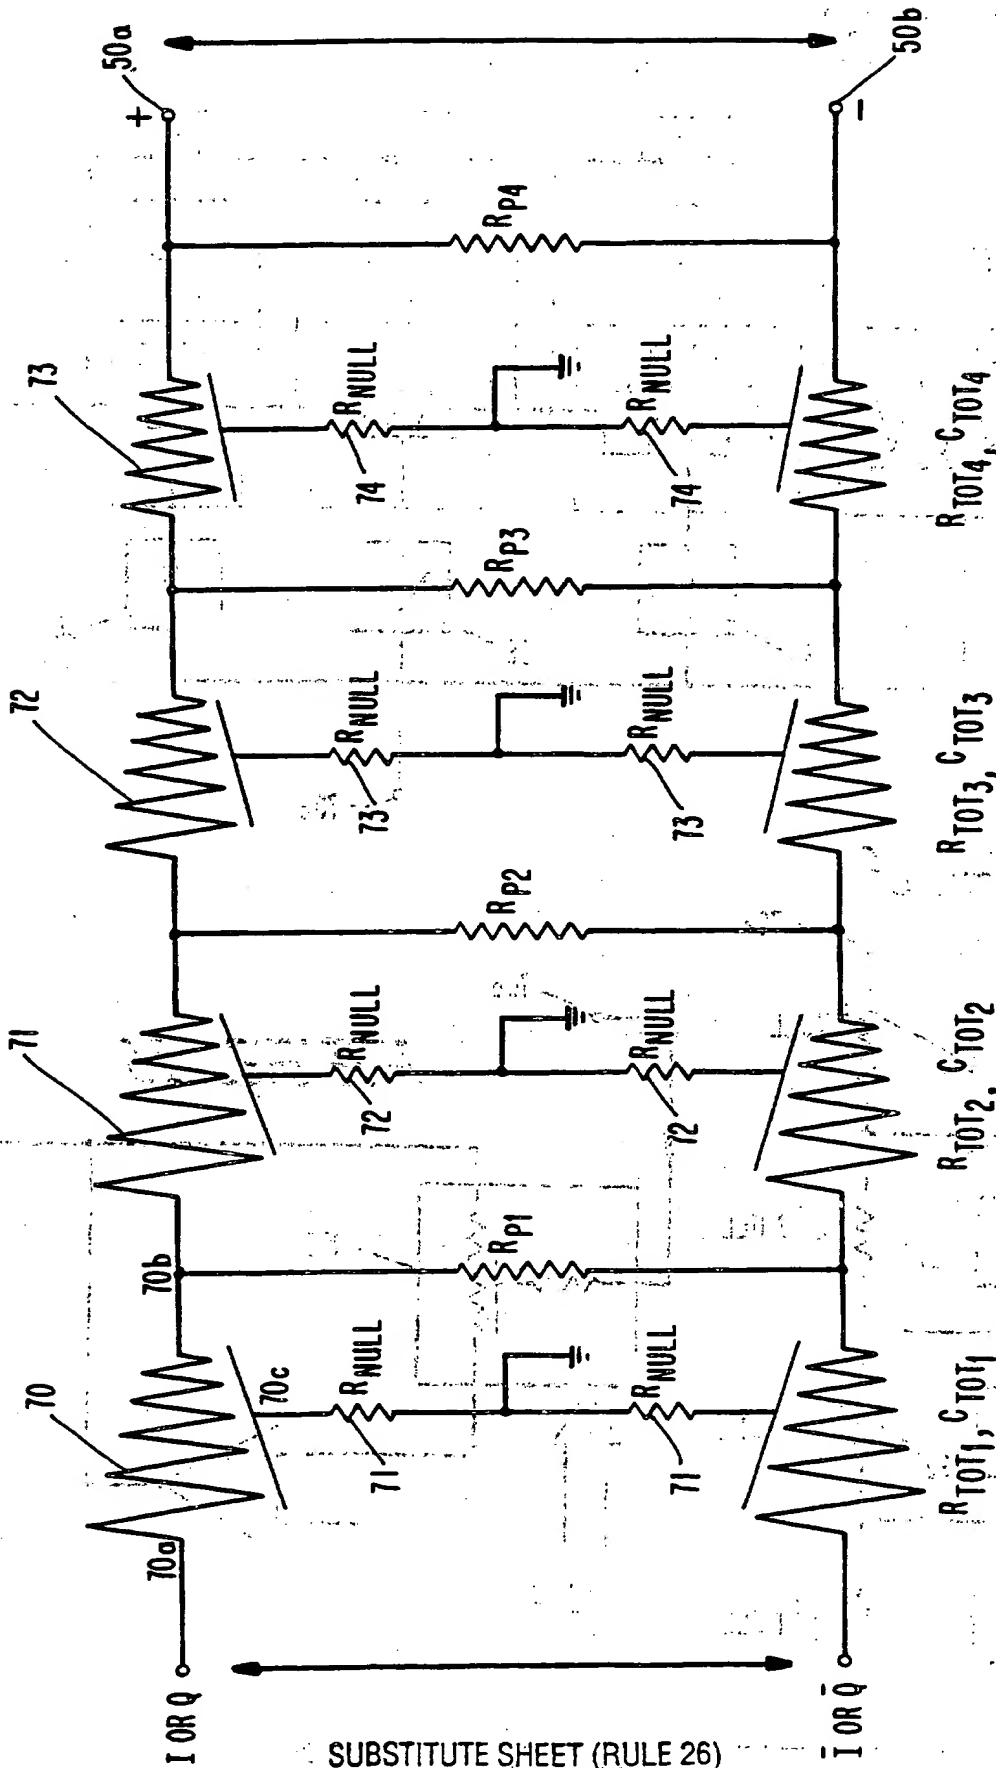


FIG. 7

Fig. 8

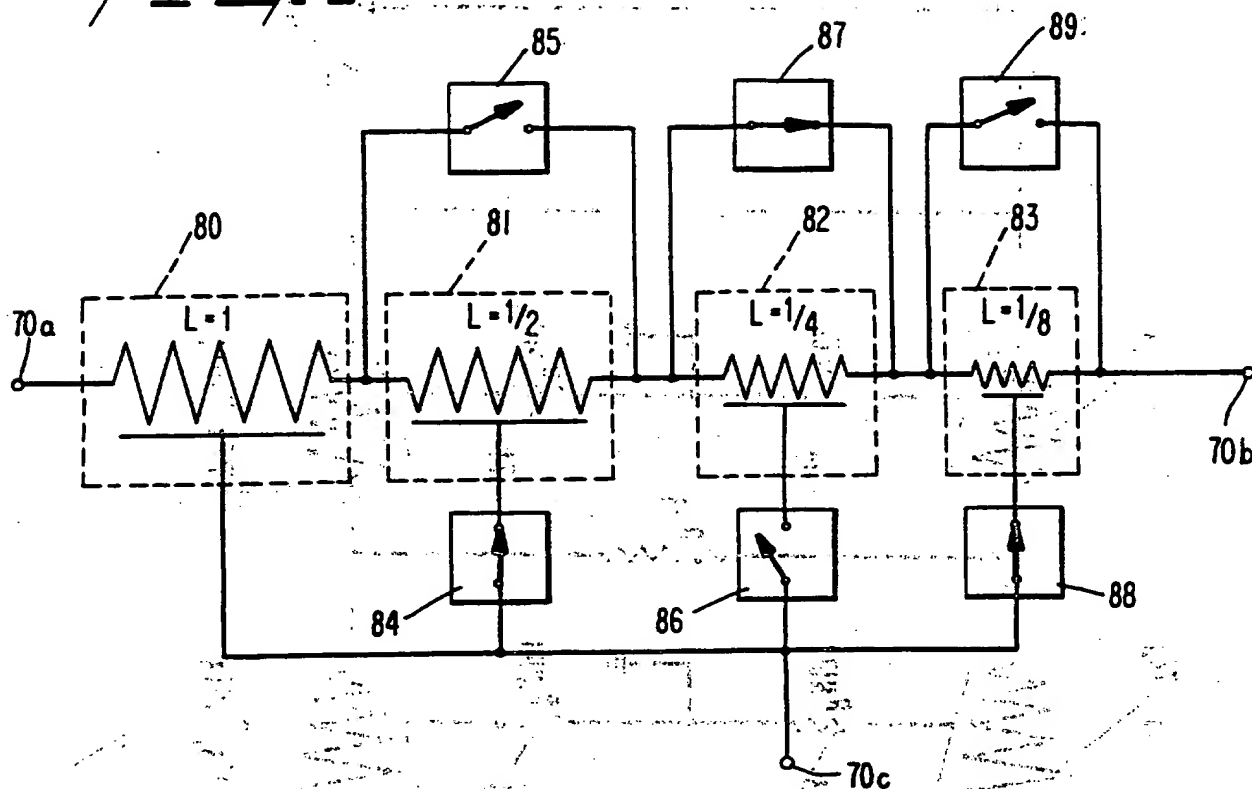


Fig. 9


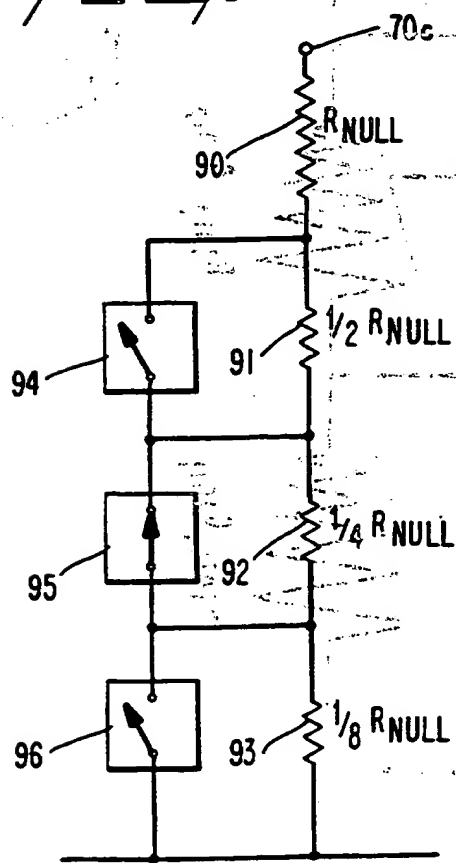


Fig. 10

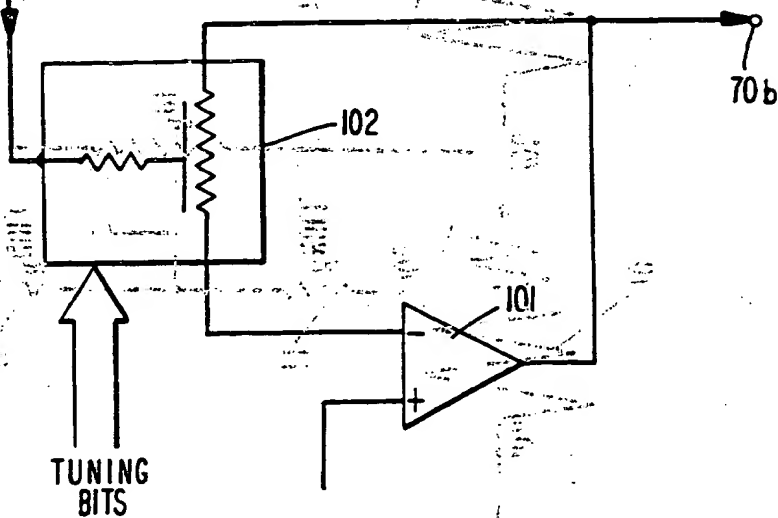

6/7

FIG. 11

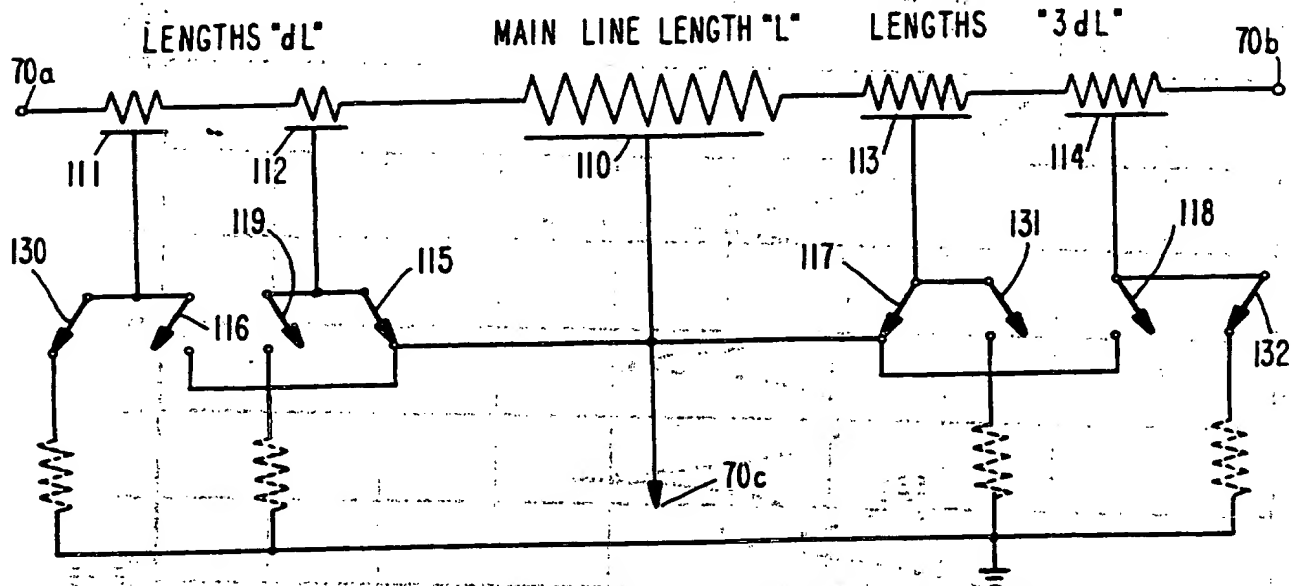


FIG. 12


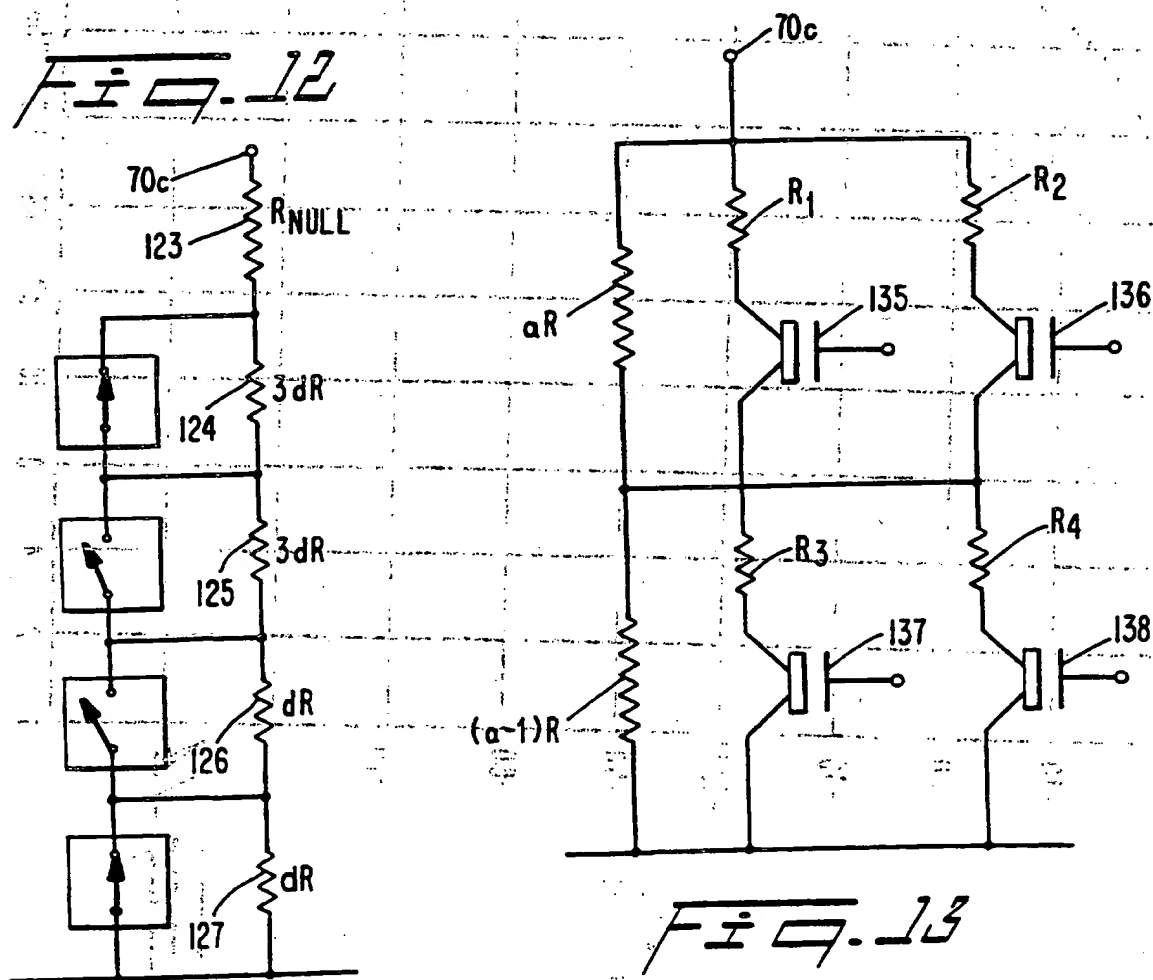


FIG. 13

SUBSTITUTE SHEET (RULE 26)

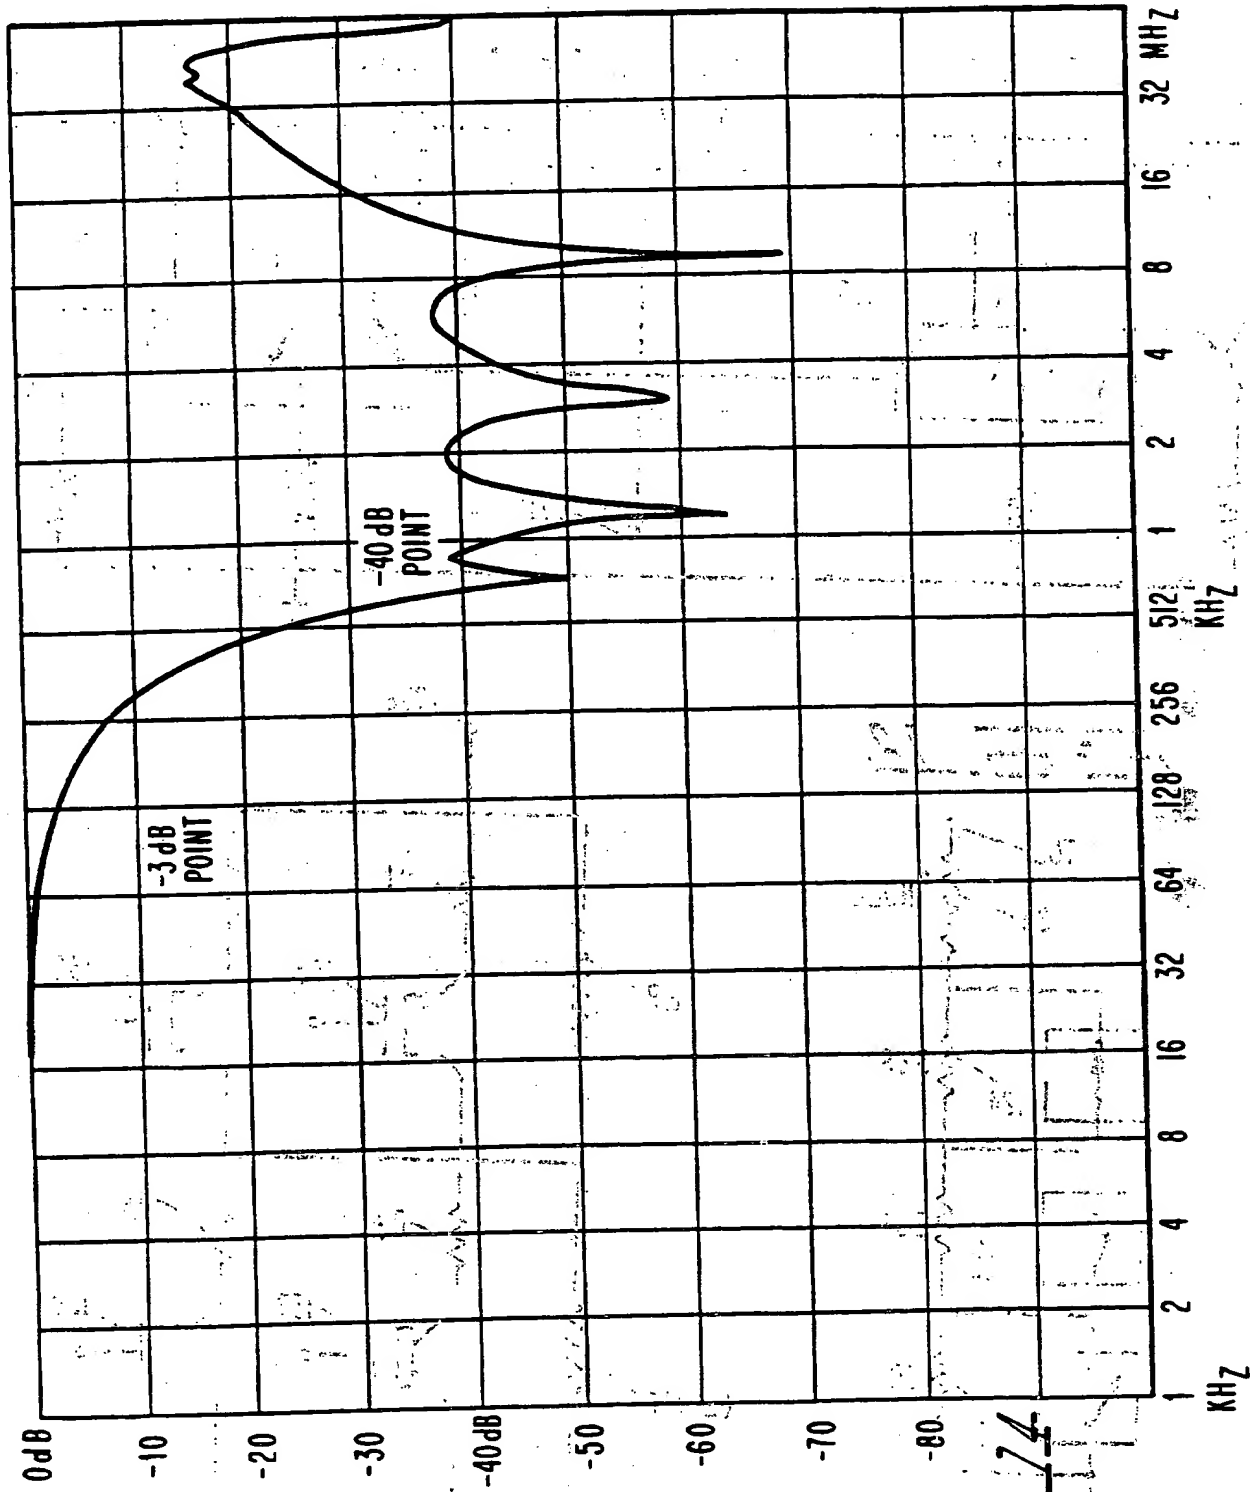

THIS PAGE BLANK (USPTO)

RECEIVED IN THE OFFICE OF THE COMMISSIONER OF PATENTS AND TRADEMARKS

UNITED STATES DEPARTMENT OF COMMERCE  
OFFICE OF THE COMMISSIONER OF PATENTS AND TRADEMARKS  
WASHINGTON, D. C. 20530  
MAY 19 1964  
RECEIVED

RECEIVED  
MAY 19 1964  
RECEIVED

RECEIVED  
MAY 19 1964  
RECEIVED




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification:</b> <b>H03C 1/54, H04L 27/20,</b> <b>H03H 7/01, 1/02</b>	<b>A3</b>	<b>(11) International Publication Number:</b> <b>WO 96/08865</b> <b>(43) International Publication Date:</b> 21 March 1996 (21.03.96)
<b>(21) International Application Number:</b> PCT/US95/11745 <b>(22) International Filing Date:</b> 14 September 1995 (14.09.95) <b>(30) Priority Data:</b> 08/305,702      14 September 1994 (14.09.94)      US <b>(71) Applicant:</b> ERICSSON INC. [US/US]; One Triangle Park, P.O. Box 13969, Research Triangle Park, NC 27709 (US). <b>(72) Inventor:</b> DENT, Paul, W.; Stehags Prastgard., S-240 36 Stehag (SE). <b>(74) Agents:</b> GRUDZIECKI, Ronald, L. et al.; Burns, Doane, Swecker & Mathis, P.O. Box 1404, Alexandria, VA 22313-1404 (US).		<b>(81) Designated States:</b> AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).  <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>  <b>(88) Date of publication of the international search report:</b> 18 April 1996 (18.04.96)

**(54) Title:** QUADRATURE MODULATOR WITH INTEGRATED DISTRIBUTED RC FILTERS**(57) Abstract**

A quadrature modulator for generation of complex modulated signals includes a unique pair of balanced, low-pass filters which, through a switching arrangement for switching into and out of the circuit distributed RC line sections and corresponding ground resistances are able to redress problems associated with manufacturing tolerances.

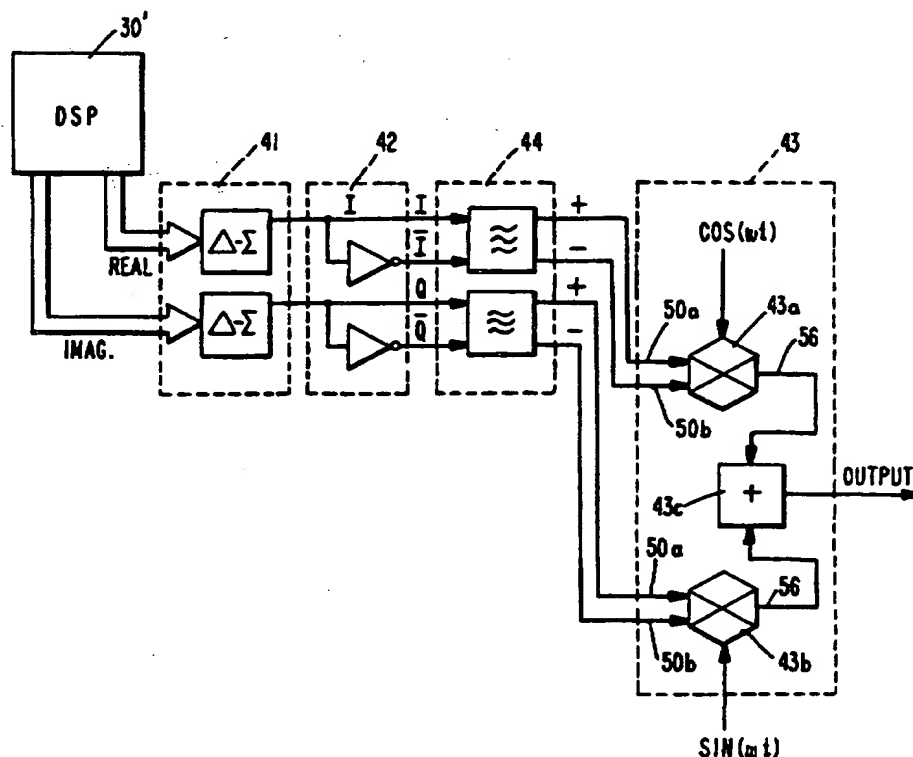

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				



# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/11745

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H03C1/54 H04L27/20 H03H7/01 H03H1/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H03C H04L H03H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	IEICE TRANSACTIONS ON ELECTRONICS, vol. E75-C, no. 6, 1 June 1992 pages 674-682, XP 000310894 NOBUAKI IMAI ET AL 'AN EXTREMELY ACCURATE QUADRATURE MODULATOR IC USING PHASE DETECTION METHOD AND ITS APPLICATION TO MULTILEVEL QAM SYSTEMS' see page 680, column 2, line 8 - page 681, column 2, line 1; figure 17	1
A	EP,A,0 426 560 (MATRA COMMUNICATION) 8 May 1991 see page 3, line 25 - page 4, line 54; figure 2	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance;
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

27 February 1996

Date of mailing of the international search report

01.03.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Dhondt, I

# INTERNATIONAL SEARCH REPORT

Int:      nal Application No  
PCT/US 95/11745

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,5 189 593 (OOI LENG H) 23 February 1993 see column 1, line 60 - column 6, line 52; figures 1-5 ---	16,20,21
A	US,A,3 643 173 (WHITTEN JAMES ROBERT) 15 February 1972 see column 6, line 31 - column 7, line 75; figures 5,6A -----	20,21

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US95/11745

## Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. Claims 1-15: Quadrature Modulator
2. Claims 16-31: Filter Comprising Sensitive Elements and a Dielectric Layer

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

**information on patent family members**

PCT/US 95/11745

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0426560	08-05-91	FR-A- 2653959	03-05-91
		AT-T- 110509	15-09-94
		DE-D- 69011811	29-09-94
		DE-T- 69011811	15-12-94
		ES-T- 2060986	01-12-94
US-A-5189593	23-02-93	JP-A- 5218304	27-08-93
US-A-3643173	15-02-72	NONE	

1. The first of the two main points is that the Commission has not yet received any information from the Government of the United Kingdom regarding the proposed changes to the law of the sea. The Commission is therefore unable to make any recommendations at this time.

255

1. The first group of people who are interested in the study of the history of the United States are the people who are interested in the history of the United States. This group of people is interested in the history of the United States because they want to know more about the United States. They want to know more about the United States because they want to know more about the United States.

22-1 22-2

24

Page 10

1. The first step in the process is to identify the problem or issue that needs to be addressed. This involves gathering information and understanding the context of the problem.

65

100

*Journal of Management Education* 30(6)

1992)